⬤ OxyTech

Luminaire
Code   SCKRS05UWW_OP
Name   XCLICK
Measurem.
Code   SCKRS05UWW_OP
Name   XCLICK

Luminaire Flux	2204.65 lm	Luminaire Power	50.00 W	Efficacy	44.09 lm/W	Efficiency	99.94%
Lamps Flux	2206.00 lm	Maximum value	341.05 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	

Rectangular Luminaire	Length	1496 mm	Width	15 mm	Height	25 mm
Rectangular Luminous Area	Length	1496 mm	Width	15 mm	Height	25 mm

Horizontal Luminous Area	0.022440 m2	Emitting area on Plane 180°	0.037400 m2
Emitting area on Plane 0°	0.037400 m2	Emitting area on Plane 270°	0.000375 m2
Emitting area on Plane 90°	0.000375 m2	Glare area at 76°	0.041718 m2

Coordinate system	CG	Symmetry Type	Rotosymmetrical
Date	26-08-2021	Maximum Gamma Angle	90
Measurement Distance	0.00	Measurement Flux	883.00 lm

Operator		Source Voltage [V]	
Temperature	25.00 °C	Source current [A]	
Humidity	60.00 %	Photocell	
Notes			

Luminaire Lamps

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	SCKRS05UWW_OP	XCLICK	2206.00	50.00	1

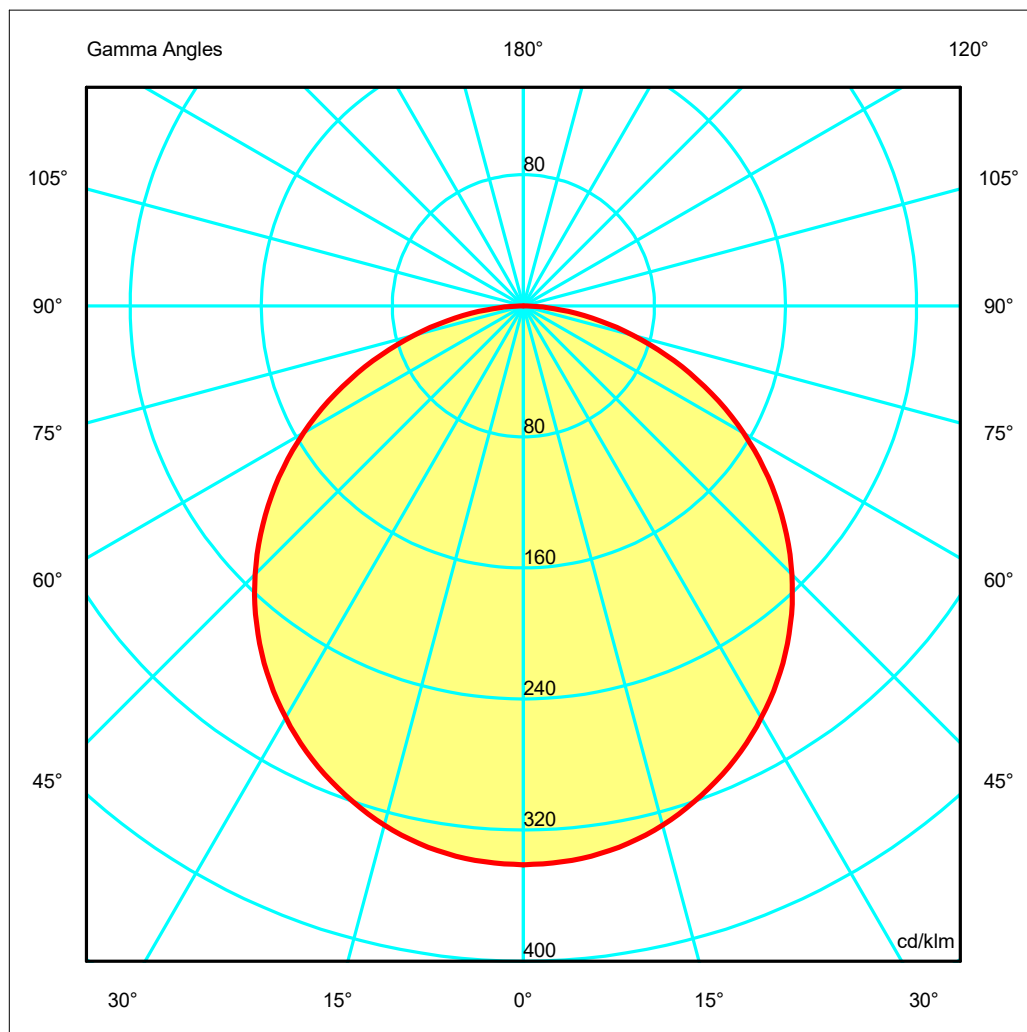|			
C.I.E.	46 78 95 100 100	D DIN 5040	A30
F UTE	1.00 E	B NBN	BZ 5

1496mm x 15mm

180.0

C Halfplanes

180.0 ——————— 0.0

ULOR 0.00 %

DLOR 99.94 %

RN 0.00 %

OxyTech

Luminaire
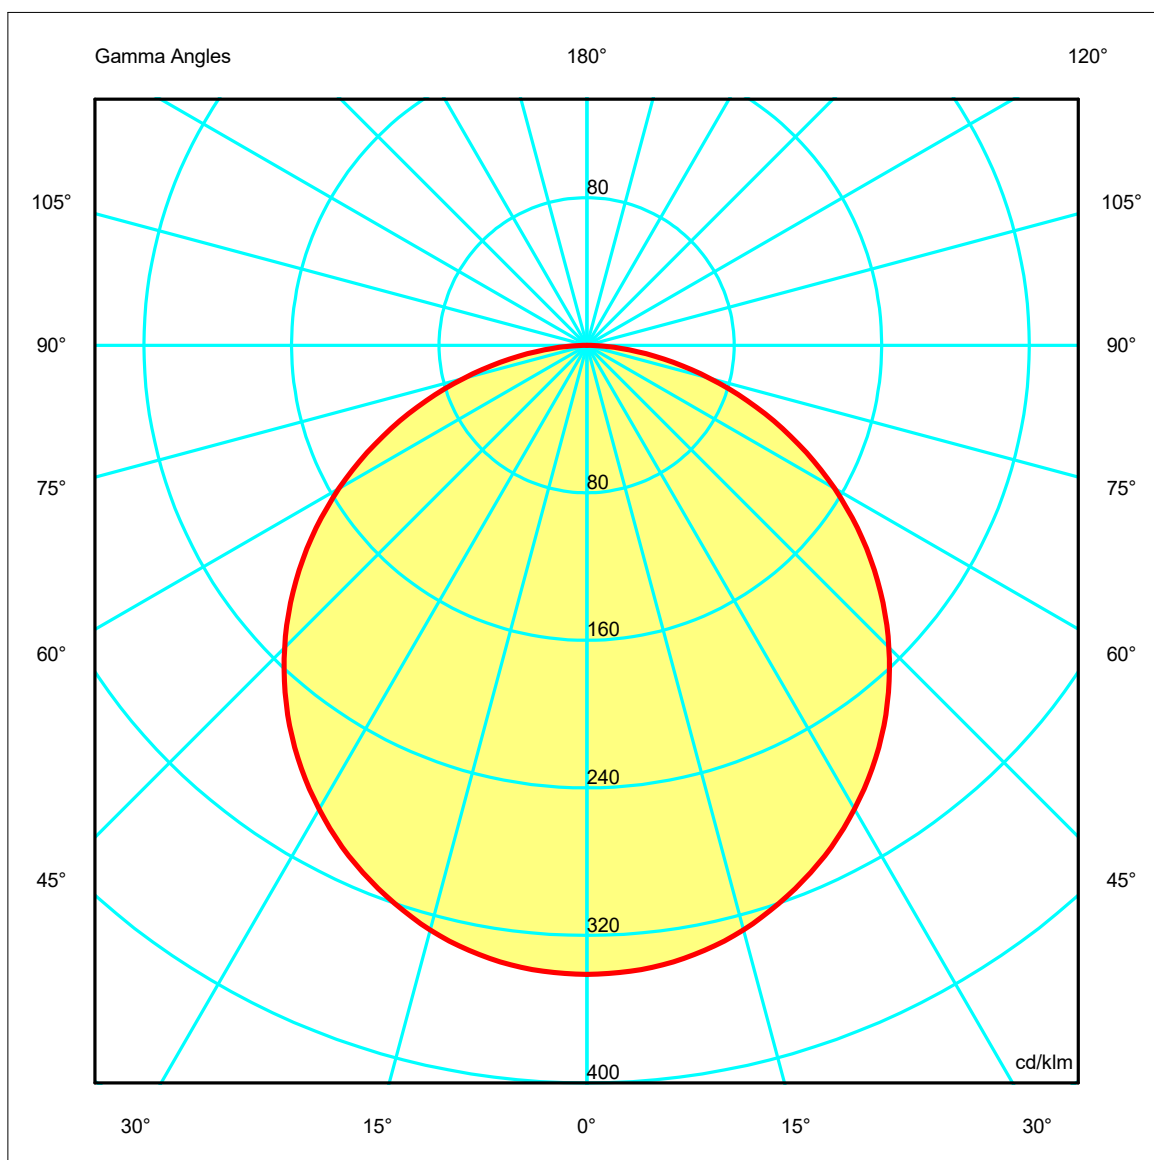Code   SCKRS05UWW_OP
Name   XCLICK
Measurem.
Code   SCKRS05UWW_OP
Name   XCLICK

Luminaire Flux	2204.65 lm	Luminaire Power	50.00 W	Efficacy	44.09 lm/W	Efficiency	99.94%
Lamps Flux	2206.00 lm	Maximum value	341.05 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	

1496mm x 15mm

C Halfplanes

180.0 ———————————— 0.0

180.0

Gamma Angles   180°   120°

105°   105°

90°   90°

80

75°   75°

80

60°   60°

160

45°   45°

240

320

400   cd/klm

30°   15°   0°   15°   30°

OxyTech

Luminaire
Code   SCKRS05UWW_OP
Name   XCLICK
Measurem.
Code   SCKRS05UWW_OP
Name   XCLICK

Luminaire Flux	2204.65 lm	Luminaire Power	50.00 W	Efficacy	44.09 lm/W	Efficiency	99.94%
Lamps Flux	2206.00 lm	Maximum value	341.05 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	20.4	21.8	20.7	22.0	24.5	22.6	24.0	22.9	24.2	24.5
x=2H y=3H	21.5	22.7	21.8	23.0	26.0	24.3	25.5	24.6	25.8	26.0
x=2H y=4H	21.9	23.0	22.2	23.3	26.7	24.9	26.1	25.3	26.4	26.7
x=2H y=6H	22.1	23.2	22.4	23.5	27.1	25.4	26.5	25.8	26.8	27.1
x=2H y=8H	22.1	23.1	22.5	23.5	27.3	25.6	26.6	26.0	26.9	27.3
x=2H y=12H	22.1	23.1	22.5	23.4	27.3	25.7	26.7	26.1	27.0	27.3
x=4H y=2H	21.2	22.3	21.5	22.6	24.7	23.0	24.1	23.3	24.4	24.7
x=4H y=3H	22.4	23.4	22.8	23.7	26.3	24.7	25.7	25.1	26.0	26.3
x=4H y=4H	22.9	23.7	23.3	24.1	27.0	25.4	26.3	25.8	26.7	27.0
x=4H y=6H	23.2	23.9	23.6	24.3	27.6	26.0	26.8	26.4	27.2	27.6
x=4H y=8H	23.2	23.9	23.7	24.3	27.7	26.2	26.9	26.6	27.3	27.7
x=4H y=12H	23.3	23.9	23.7	24.3	27.8	26.4	27.0	26.8	27.4	27.8
x=8H y=4H	23.2	23.9	23.6	24.3	27.0	25.5	26.2	26.0	26.6	27.0
x=8H y=6H	23.5	24.1	24.0	24.5	27.6	26.2	26.7	26.6	27.2	27.6
x=8H y=8H	23.6	24.1	24.1	24.6	27.8	26.4	26.9	26.9	27.3	27.8
x=8H y=12H	23.7	24.1	24.2	24.6	28.0	26.6	27.0	27.1	27.5	28.0
x=12H y=4H	23.2	23.8	23.6	24.2	27.0	25.5	26.1	26.0	26.6	27.0
x=12H y=6H	23.6	24.1	24.1	24.5	27.6	26.2	26.7	26.6	27.1	27.6
x=12H y=8H	23.7	24.1	24.2	24.6	27.8	26.4	26.8	26.9	27.3	27.8