

**Luminaire**

 Code DM01WW50  
 Name XDOMINO


**Measur.**

 Code DM01WW50  
 Name XDOMINO

Luminaire Flux	987.76 lm	Luminaire Power	15.00 W	Efficacy	65.85 lm/W	Efficiency	84.35%
Lamps Flux	1171.00 lm	Maximum value	1069.00 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	74 mm	Width	74 mm	Height	82 mm
Rectangular Luminous Area		Length	74 mm	Width	74 mm	Height	20 mm
Horizontal Luminous Area	0.005476 m2	Emitting area on Plane 180°		Emitting area on Plane 270°		Emitting area on Plane 90°	0.001480 m2
Emitting area on Plane 0°	0.001480 m2	Emitting area on Plane 180°		Emitting area on Plane 270°		Emitting area on Plane 90°	0.001480 m2
Emitting area on Plane 90°	0.001480 m2	Emitting area on Plane 180°		Emitting area on Plane 270°		Emitting area on Plane 90°	0.002761 m2
Coordinate system	CG	Symmetry Type		Maximum Gamma Angle		Measurement Flux	Rotosymmetrical
Date	06-09-2021	Measurement Flux		Measurement Flux		Measurement Flux	90
Measurement Distance	0.00	Measurement Flux		Measurement Flux		Measurement Flux	884.40 lm
Operator		Source Voltage [V]		Source current [A]		Photocell	
Temperature	25.00 °C	Source Voltage [V]		Source current [A]		Photocell	
Humidity	60.00 %	Source Voltage [V]		Source current [A]		Photocell	
Notes		Source Voltage [V]		Source current [A]		Photocell	

Line		Code		Luminaire Lamps		Flux [lm]	Pow. [W]	Q.ty
		DM01WW50		XDOMINO		1171.00	15.00	1
C.I.E.	93 98 100 100 84			D DIN 5040		A60		
F UTE	0.84 A			B NBN		BZ 1		

74mm x 74mm




C Halfplanes

180.0 ——— 0.0

ULOR 0.00 %

DLOR 84.35 %

RN 0.00 %

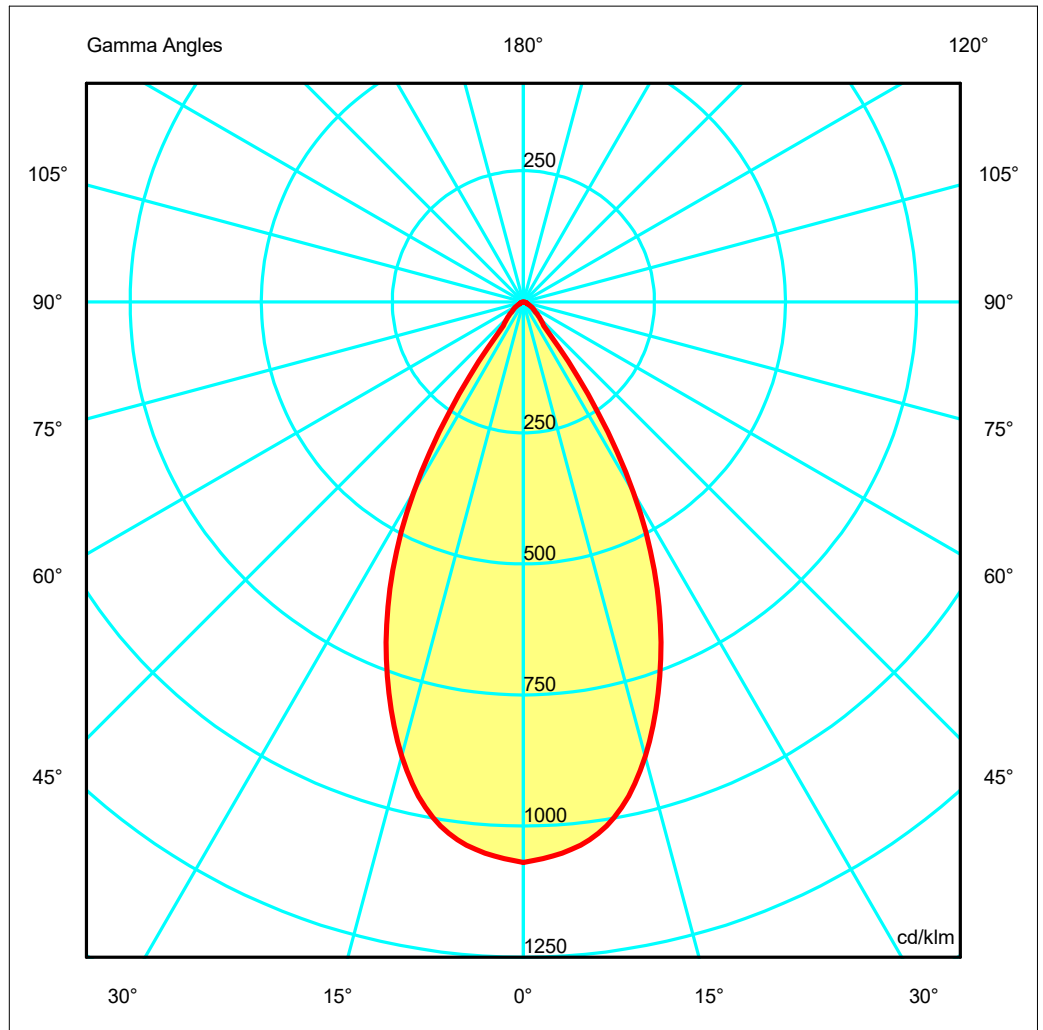



**Luminaire**  
 Code DM01WW50  
 Name XDOMINO  
**Measurem.**  
 Code DM01WW50  
 Name XDOMINO

Luminaire Flux	987.76 lm	Luminaire Power	15.00 W	Efficacy	65.85 lm/W	Efficiency	84.35%
Lamps Flux	1171.00 lm	Maximum value	1069.00 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical

74mm x 74mm

C Halfplanes

180.0  0.0

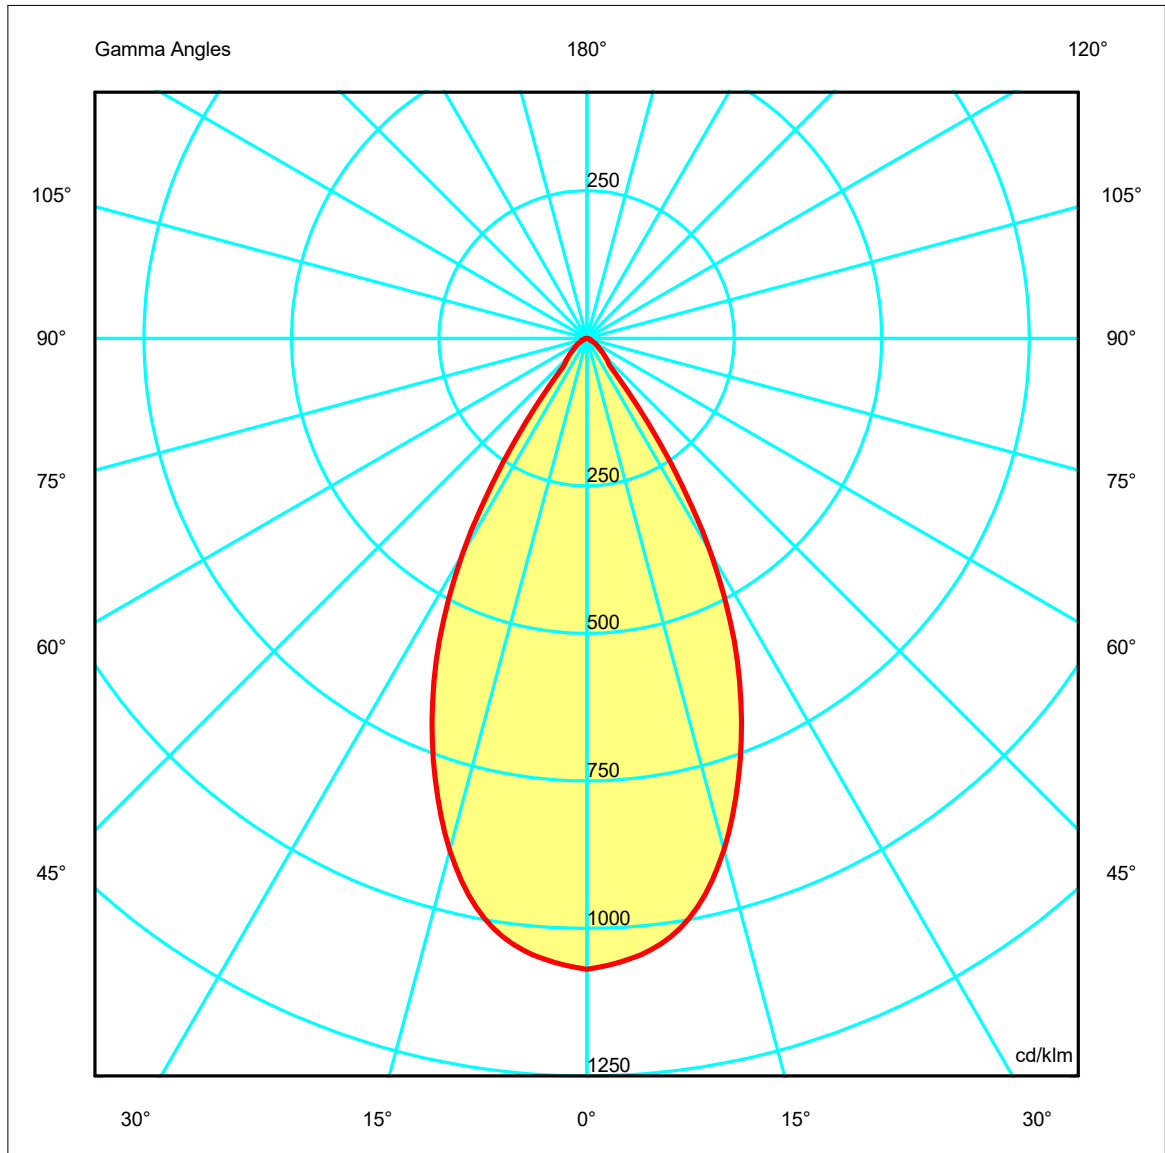

**Luminaire**

Code DM01WW50  
Name XDOMINO

**Measurement**

Code DM01WW50  
Name XDOMINO

Luminaire Flux	987.76 lm	Luminaire Power	15.00 W	Efficacy	65.85 lm/W	Efficiency	84.35%
Lamps Flux	1171.00 lm	Maximum value	1069.00 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical

**UGR**  
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	16.3	17.0	16.5	17.2	17.4	16.3	17.0	16.5	17.2	17.4
x=2H y=3H	16.3	17.0	16.6	17.2	17.4	16.3	17.0	16.6	17.2	17.4
x=2H y=4H	16.3	16.9	16.6	17.2	17.4	16.3	16.9	16.6	17.2	17.4
x=2H y=6H	16.3	16.9	16.6	17.1	17.4	16.3	16.9	16.6	17.1	17.4
x=2H y=8H	16.3	16.8	16.6	17.1	17.4	16.3	16.8	16.6	17.1	17.4
x=2H y=12H	16.2	16.8	16.6	17.1	17.4	16.2	16.8	16.6	17.1	17.4
x=4H y=2H	16.2	16.8	16.5	17.0	17.3	16.2	16.8	16.5	17.0	17.3
x=4H y=3H	16.3	16.8	16.6	17.1	17.4	16.3	16.8	16.6	17.1	17.4
x=4H y=4H	16.3	16.8	16.7	17.1	17.4	16.3	16.8	16.7	17.1	17.4
x=4H y=6H	16.4	16.7	16.8	17.1	17.5	16.4	16.7	16.8	17.1	17.5
x=4H y=8H	16.3	16.7	16.8	17.0	17.4	16.3	16.7	16.8	17.0	17.4
x=4H y=12H	16.3	16.6	16.8	17.0	17.4	16.3	16.6	16.8	17.0	17.4
x=8H y=4H	16.3	16.6	16.7	17.0	17.4	16.3	16.6	16.7	17.0	17.4
x=8H y=6H	16.3	16.6	16.8	17.0	17.4	16.3	16.6	16.8	17.0	17.4
x=8H y=8H	16.3	16.5	16.8	17.0	17.4	16.3	16.5	16.8	17.0	17.4
x=8H y=12H	16.3	16.5	16.8	16.9	17.4	16.3	16.5	16.8	16.9	17.4
x=12H y=4H	16.3	16.5	16.7	16.9	17.4	16.3	16.5	16.7	16.9	17.4
x=12H y=6H	16.3	16.5	16.8	16.9	17.4	16.3	16.5	16.8	16.9	17.4
x=12H y=8H	16.3	16.4	16.8	16.9	17.4	16.3	16.4	16.8	16.9	17.4