

Luminaire

Code GD21NW3
Name XGROUND


Measur.

Code GD21NW3
Name XGROUND

Luminaire Flux	636.59 lm	Luminaire Power	10.10 W	Efficacy	63.03 lm/W	Efficiency	99.94%
Lamps Flux	637.00 lm	Maximum value	38335.60 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	64 mm 50 mm	Height Height	75 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.001963 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.000475 m2	
Coordinate system Date Measurement Distance		CG 09-08-2021 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 611.00 lm	
Operator Temperature Humidity Notes		25.00 °C 60.00 %		Source Voltage [V] Source current [A] Photocell			


Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
	GD21NW3	XGROUND	637.00	10.10	1	
C.I.E.	99 100 100 100 100					D DIN 5040
F UTE	--					B NBN
						A60
						BZ 1

Diam=64mm



C Halfplanes

180.0 — 0.0

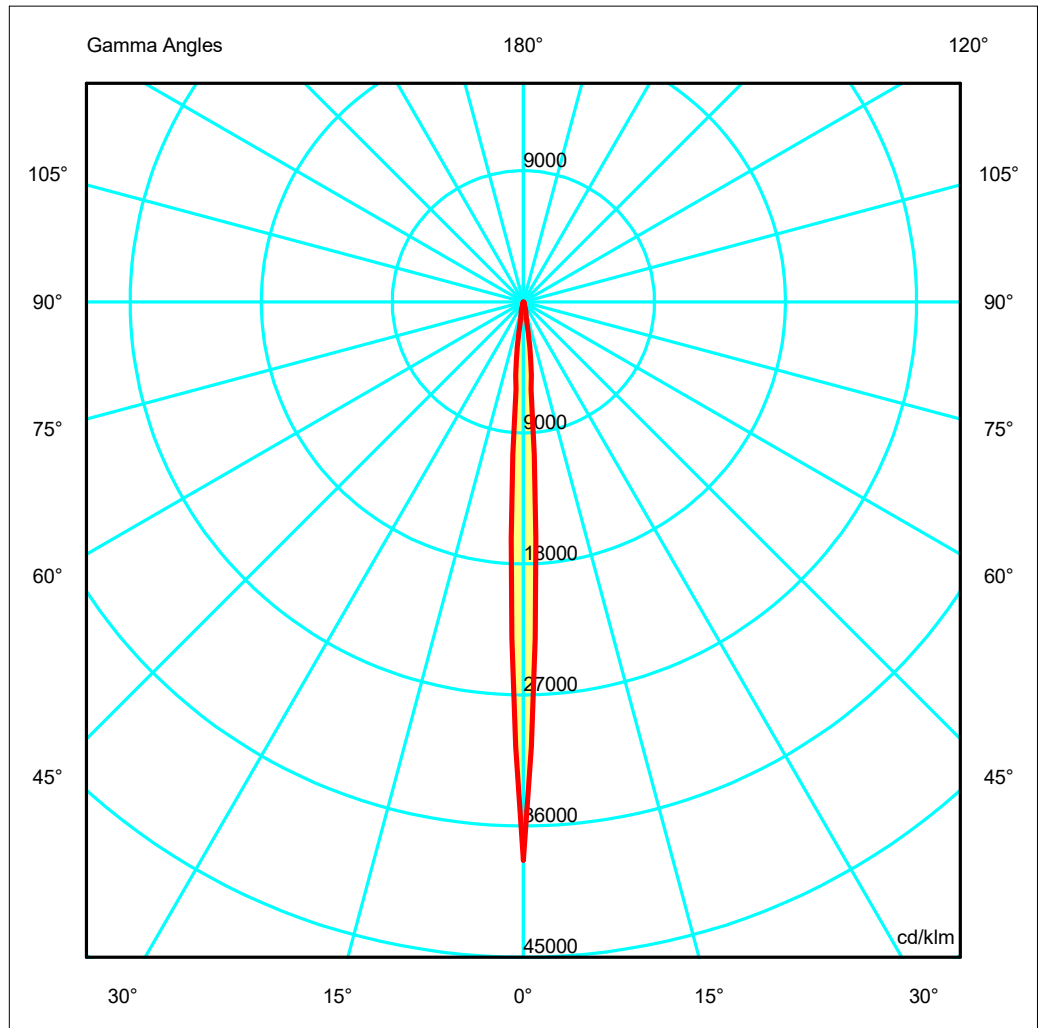ULOR 0.00 %
DLOR 99.94 %
RN 0.00 %


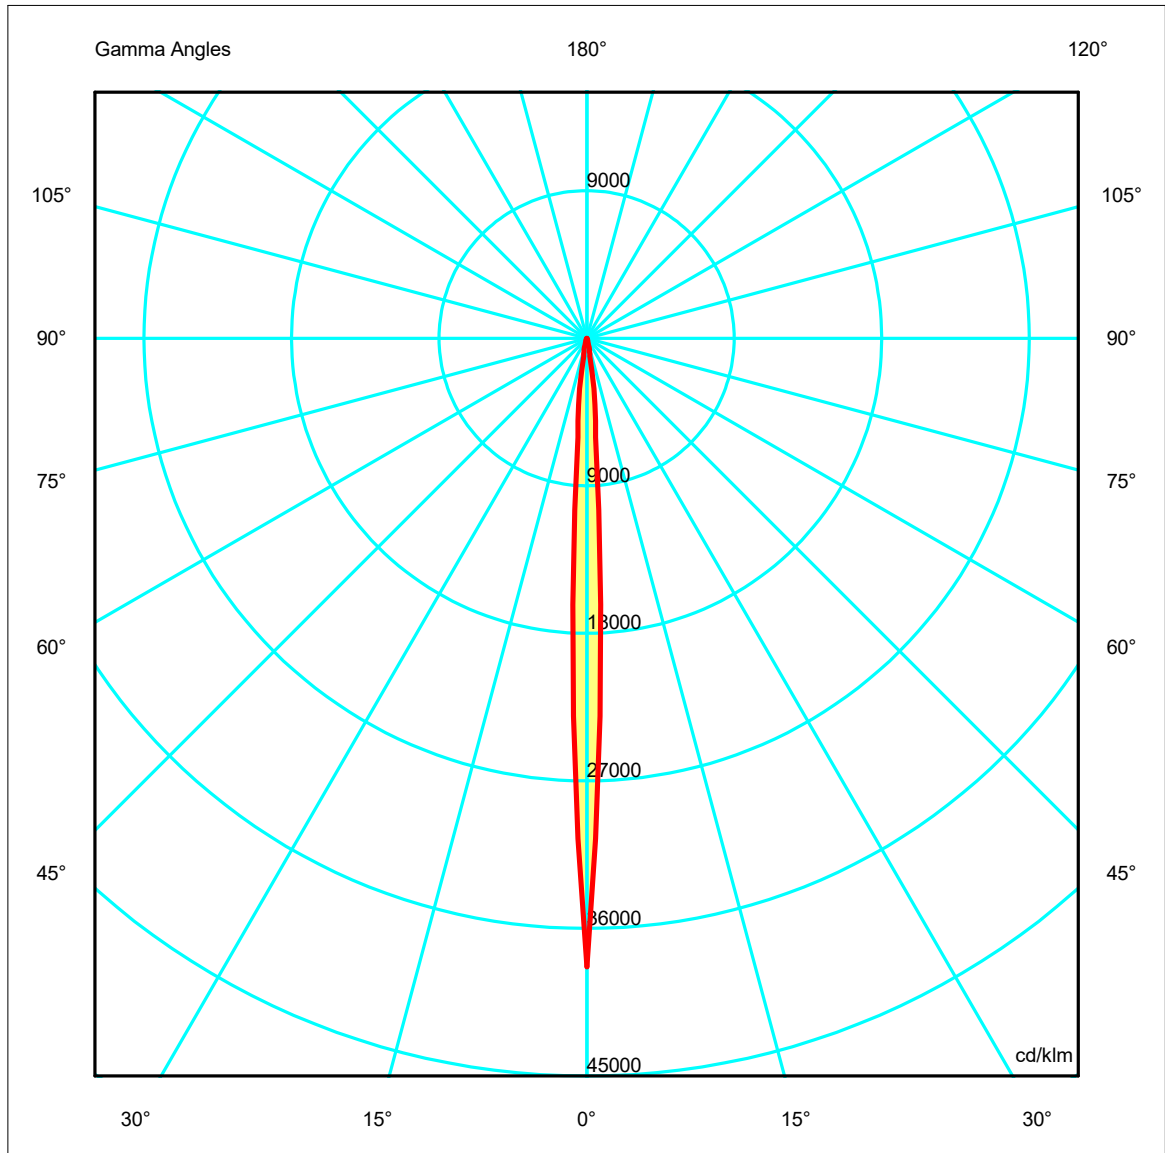

Luminaire
 Code GD21NW3
 Name XGROUND
Measurem.
 Code GD21NW3
 Name XGROUND

Luminaire Flux	636.59 lm	Luminaire Power	10.10 W	Efficacy	63.03 lm/W	Efficiency	99.94%
Lamps Flux	637.00 lm	Maximum value	38335.60 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Diam=64mm

C Halfplanes

180.0  0.0



Luminaire

Code GD21NW3
Name XGROUND

Measurement

Code GD21NW3
Name XGROUND

Luminaire Flux	636.59 lm	Luminaire Power	10.10 W	Efficacy	63.03 lm/W	Efficiency	99.94%
Lamps Flux	637.00 lm	Maximum value	38335.60 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	3.3	3.9	3.5	4.1	4.3	3.3	3.9	3.5	4.1	4.3
x=2H y=3H	3.1	3.7	3.4	3.9	4.1	3.1	3.7	3.4	3.9	4.1
x=2H y=4H	3.0	3.6	3.3	3.8	4.1	3.0	3.6	3.3	3.8	4.1
x=2H y=6H	3.0	3.5	3.3	3.7	4.0	3.0	3.5	3.3	3.7	4.0
x=2H y=8H	2.9	3.4	3.3	3.7	4.0	2.9	3.4	3.3	3.7	4.0
x=2H y=12H	2.9	3.4	3.2	3.7	4.0	2.9	3.4	3.2	3.7	4.0
x=4H y=2H	3.0	3.6	3.3	3.8	4.1	3.0	3.6	3.3	3.8	4.1
x=4H y=3H	2.9	3.4	3.2	3.7	4.0	2.9	3.4	3.2	3.7	4.0
x=4H y=4H	2.8	3.2	3.2	3.6	3.9	2.8	3.2	3.2	3.6	3.9
x=4H y=6H	2.8	3.1	3.1	3.4	3.8	2.8	3.1	3.1	3.4	3.8
x=4H y=8H	2.7	3.0	3.1	3.4	3.8	2.7	3.0	3.1	3.4	3.8
x=4H y=12H	2.7	2.9	3.1	3.3	3.7	2.7	2.9	3.1	3.3	3.7
x=8H y=4H	2.7	3.0	3.1	3.4	3.8	2.7	3.0	3.1	3.4	3.8
x=8H y=6H	2.6	2.8	3.1	3.3	3.7	2.6	2.8	3.1	3.3	3.7
x=8H y=8H	2.6	2.8	3.0	3.2	3.7	2.6	2.8	3.0	3.2	3.7
x=8H y=12H	2.5	2.7	3.0	3.1	3.6	2.5	2.7	3.0	3.1	3.6
x=12H y=4H	2.7	2.9	3.1	3.3	3.7	2.7	2.9	3.1	3.3	3.7
x=12H y=6H	2.6	2.8	3.0	3.2	3.7	2.6	2.8	3.0	3.2	3.7
x=12H y=8H	2.5	2.7	3.0	3.1	3.6	2.5	2.7	3.0	3.1	3.6