

Luminaire


 Code WK01WW 15DEG
 Name XWOK

Measur.

 Code WK01WW 15DEG
 Name XWOK

Luminaire Flux	1255.80 lm	Luminaire Power	12.00 W	Efficacy	104.65 lm/W	Efficiency	99.98%
Lamps Flux	1256.00 lm	Maximum value	4796.26 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	100 mm 100 mm	Height Height	10 mm 10 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.007854 m2 0.001000 m2 0.001000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.001000 m2 0.001000 m2 0.002870 m2	
Coordinate system Date Measurement Distance		CG 09-09-2021 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 1256.00 lm	
Operator Temperature Humidity Notes		25.00 °C 60.00 %		Source Voltage [V] Source current [A] Photocell			

Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
	WK01WW 15DEG	WK01WW	1256.00	12.00	1	
C.I.E.	94 97 99 100 100					D DIN 5040
F UTE	1.00 A					B NBN
			A60			BZ 1

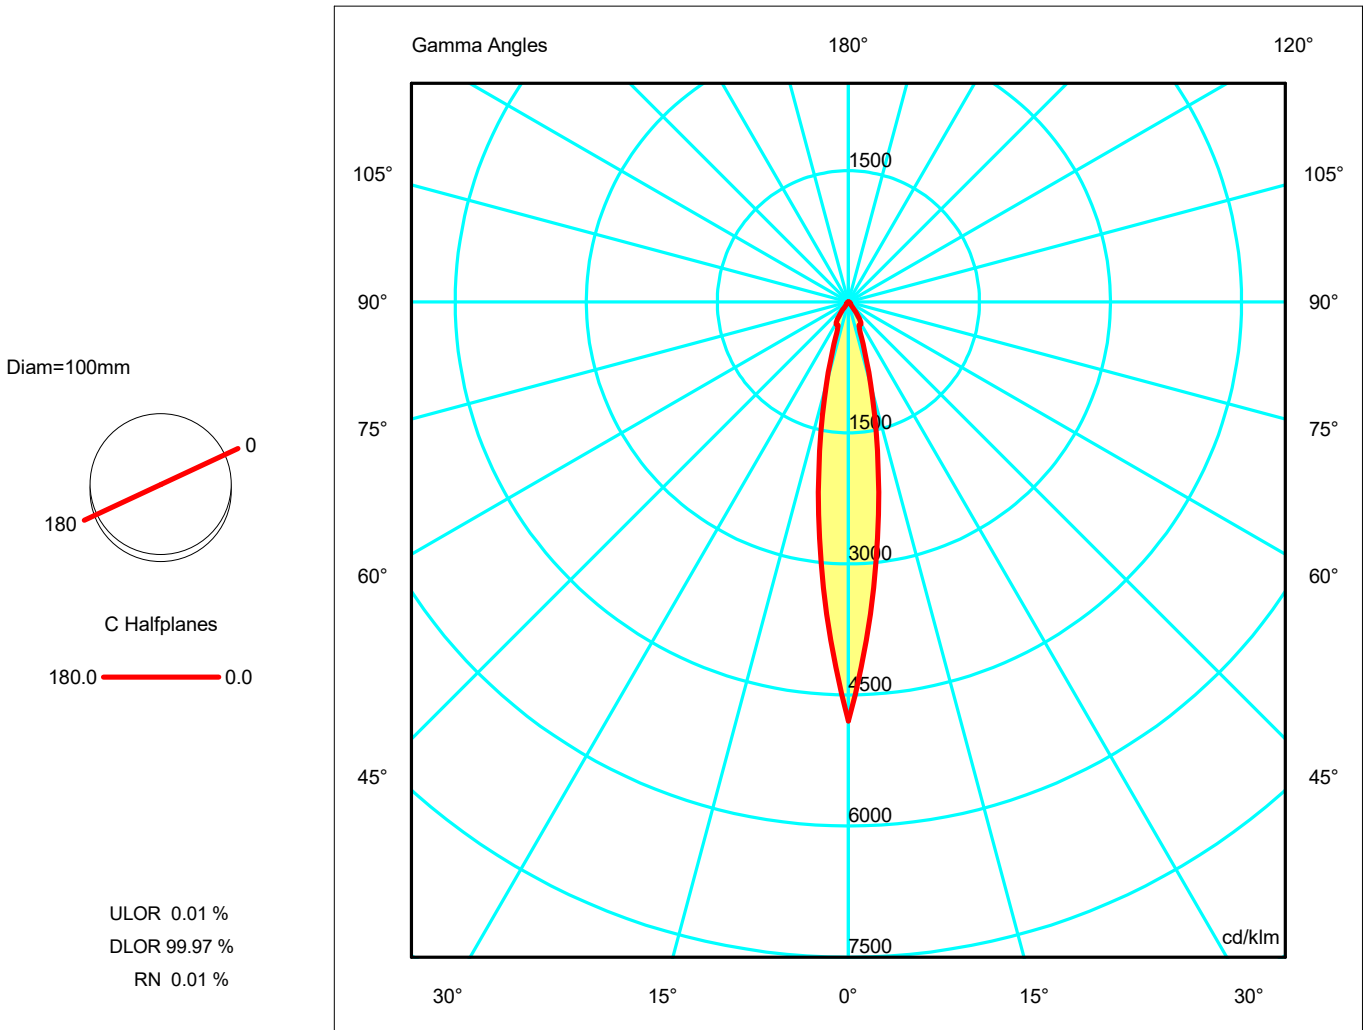



Luminaire
 Code WK01WW 15DEG
 Name XWOK
Measurement
 Code WK01WW 15DEG
 Name XWOK

Luminaire Flux	1255.80 lm	Luminaire Power	12.00 W	Efficacy	104.65 lm/W	Efficiency	99.98%
Lamps Flux	1256.00 lm	Maximum value	4796.26 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Diam=100mm

C Halfplanes

180.0  0.0

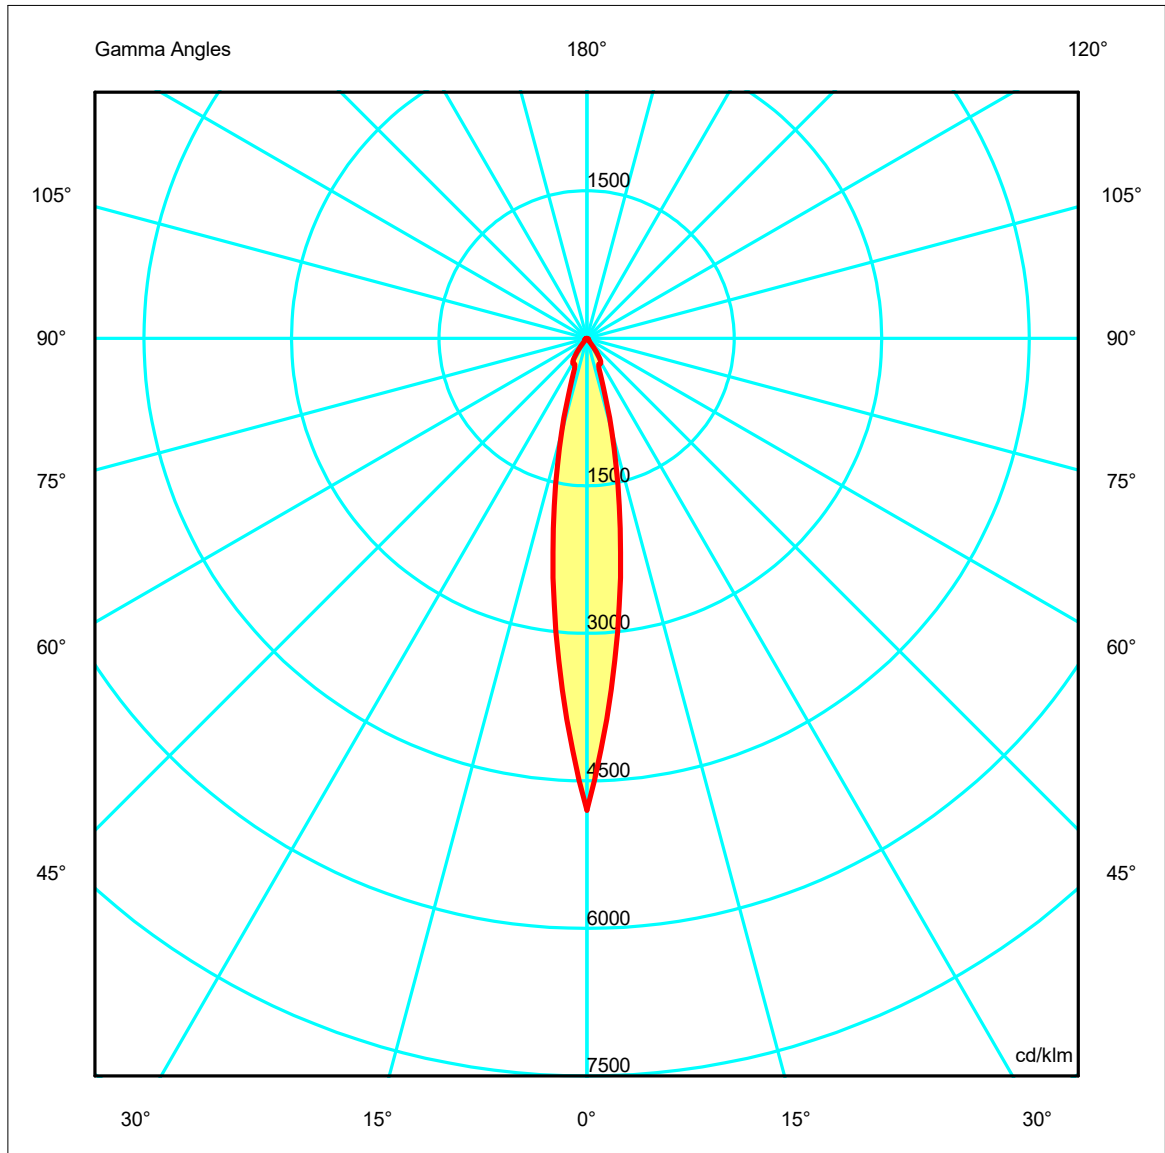

Luminaire

Code WK01WW 15DEG

Name XWOK

Measurement

Code WK01WW 15DEG

Name XWOK

Luminaire Flux	1255.80 lm	Luminaire Power	12.00 W	Efficacy	104.65 lm/W	Efficiency	99.98%
Lamps Flux	1256.00 lm	Maximum value	4796.26 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	13.9	14.6	14.1	14.8	15.0	13.9	14.6	14.1	14.8	15.0
x=2H y=3H	14.7	15.3	14.9	15.5	15.8	14.7	15.3	14.9	15.5	15.8
x=2H y=4H	15.1	15.7	15.4	16.0	16.2	15.1	15.7	15.4	16.0	16.2
x=2H y=6H	15.4	16.0	15.7	16.2	16.5	15.4	16.0	15.7	16.2	16.5
x=2H y=8H	15.5	16.0	15.8	16.3	16.6	15.5	16.0	15.8	16.3	16.6
x=2H y=12H	15.5	16.0	15.8	16.3	16.6	15.5	16.0	15.8	16.3	16.6
x=4H y=2H	14.1	14.7	14.4	15.0	15.2	14.1	14.7	14.4	15.0	15.2
x=4H y=3H	15.2	15.7	15.5	16.0	16.3	15.2	15.7	15.5	16.0	16.3
x=4H y=4H	15.8	16.2	16.2	16.6	16.9	15.8	16.2	16.2	16.6	16.9
x=4H y=6H	16.2	16.6	16.6	16.9	17.3	16.2	16.6	16.6	16.9	17.3
x=4H y=8H	16.3	16.6	16.7	17.0	17.4	16.3	16.6	16.7	17.0	17.4
x=4H y=12H	16.3	16.6	16.8	17.0	17.4	16.3	16.6	16.8	17.0	17.4
x=8H y=4H	16.0	16.4	16.4	16.7	17.1	16.0	16.4	16.4	16.7	17.1
x=8H y=6H	16.5	16.8	17.0	17.2	17.7	16.5	16.8	17.0	17.2	17.7
x=8H y=8H	16.7	16.9	17.1	17.3	17.8	16.7	16.9	17.1	17.3	17.8
x=8H y=12H	16.7	16.9	17.2	17.4	17.8	16.7	16.9	17.2	17.4	17.8
x=12H y=4H	16.0	16.3	16.5	16.7	17.1	16.0	16.3	16.5	16.7	17.1
x=12H y=6H	16.5	16.8	17.0	17.2	17.7	16.5	16.8	17.0	17.2	17.7
x=12H y=8H	16.7	16.9	17.2	17.3	17.8	16.7	16.9	17.2	17.3	17.8